

A Knowledge Based System for Valuing Variations in Civil Engineering Works: a User Centred Approach

M. Sutrisna¹, D. Proverbs¹, K. Potts² and K. Buckley³

ABSTRACT | There has been much evidence that valuing variations in construction projects can lead to conflicts and disputes leading to loss of time, efficiency, and productivity. One of the reasons for these conflicts and disputes concerns the subjectivity of the project stakeholders involved in the process. One way to minimise this is to capture and collate the knowledge and perceptions of the different parties involved in order to develop a robust mechanism for valuing variations. Focusing on the development of such a mechanism, the development of a Knowledge Based System (KBS) for valuing variations in civil engineering work is described. Evaluation of the KBS involved demonstration to practitioners in the construction industry to support the contents of the knowledge base and perceived usability and acceptance of the system. Results support the novelty, contents, usability, and acceptance of the system, and also identify further potential developments of the KBS.

KEYWORDS | civil engineering, knowledge based system, user interface, valuation of variations

1 Introduction

In construction project management research, the subject of variations has attracted considerable attention and further study [3; 9; 12]. Variations have become an almost inevitable part of the construction process particularly within the traditional approach, which is still widely used in the UK and overseas [33].

The valuation of variations has long been recognised as one of the commonest sources of disputes in the construction industry [19]. Several methods exist to value variations, and different circumstances require the application of appropriate valuation methods. Problems normally occur when there are different

perceptions between the project stakeholders regarding the circumstances. Hibberd [13] has warned that the valuation of variations, in many cases, depends upon a high degree of personal opinion or judgment.

In order to respond to these problems, the ICE 7th Measurement Version, 1999 [35] has provided three mechanisms, namely the quotation mechanism, the negotiation mechanism, and the engineer-determination mechanism [32]. However, the quotation can be rejected, the negotiation may fail to reach a mutual agreement, and the contractor may be dissatisfied with the engineer's determination then proceed through claims or even disputes. Thus, a need to have a structured and robust mechanism for valuing variations has been articulated [40].

1, Research Institute in Advanced Technologies, University of Wolverhampton, Wolverhampton, WV1 1SB

2, School of Engineering and the Built Environment, University of Wolverhampton, Wolverhampton, WV1 1SB

3, School of Computing and Information Technology, University of Wolverhampton, Wolverhampton, WV1 1SB

In light of this, the research aims to develop such mechanism to minimise conflicts and disputes from the valuation of variations. The selected methodology for the main data collection was the questionnaire survey. Findings of the questionnaire survey has been reported in various publications [33; 34] Based on the findings, a Knowledge Based System (KBS) has been developed to incorporate the three mechanisms using the Java Server Pages (JSP) technology involving a database system as the main knowledge repository system. The main objectives of developing such a system is to preserve and disseminate the captured knowledge to the UK construction industry, particularly in quantity surveying of civil engineering sector. Although it has been generally accepted that a standard manual on the best way to incorporate human factors does not exist [23], the main success measures of the developed system were defined as the users participation in the entire life cycle of the system, adequacy of the knowledge base contents, and perceived usability and acceptance. Interviews with practitioners from the construction industry were carried out to evaluate the KBS.

This paper aims to discuss the development and evaluation phases of the KBS, namely the Dynamic Expert-system for Valuing-variations in Civil Engineering (DEViCE), which was developed to preserve and disseminate the captured knowledge on valuing variations and intended to assist practitioners in the UK construction industry to minimise conflicts and disputes from the valuation of variations. At this prototyping phase, the DEViCE is focused on civil engineering works, particularly excavation works, and hence the ICE 7th [35] was used as the platform.

2 Valuing Variations

Variations may be required in the case of mistakes in the tender documents, or waivers by owners and the promise to pay [39], by a contractor's proposal in the case of emergency works regarding safety and/or compliance with statutory regulations [38] or simply

for the benefit of the project i.e. in terms of savings or improvements in constructability [13]. Whether a particular work item can be treated as a variation or should be included in the original scope of works would depend on the clauses contained in the contract documents. Standard forms of contracts have been designed to standardise the duties of contractors, employers and engineers and to distribute the risks fairly [1].

Many of the problems associated with the valuation of variations [16; 19; 22; 40] have been attributed to the failure of the traditional cost model, i.e. the bill of quantities [5]. The bill of quantities (BoQ) have been acknowledged as the main financial control system between the client and the contractor [25]. Under the traditional rules for variations, the rate and price quoted in the BoQ is normally used to determine the value of each variation. From the contractors' point of view, these individual rates and prices may not necessarily provide an accurate figure for individual work items, i.e. quoted in the tender only for the specified amount of works and/or calculated to maintain their competitiveness in the tender.

In respond to this problem, two frameworks for valuing variations were developed for excavation works and concrete works respectively [27; 30] at the earlier stages of this research. The platform for the excavation works framework was determined to be the ICE 7th [35]. According to this standardised form of contract, after a variation has been authorised by the Engineer [Clause 51], the Contractor may be requested to prepare a quotation [Clause 52(1)]. The formulation of this quotation is left to the discretion of the Contractor. In the event that the Engineer rejects the quotation or in the absence of such a request, the Contractor is required to prepare a quotation based on the prices and rates in the Contract [Clause 52(2)].

This quotation scheme provides flexibility to contractors to pre-price variations. In the event that the Engineer rejects the quotation(s), a scheme for negotiation is

provided by Clause [52(2)(b)(ii)] calling for a mutual agreement between the Engineer and the Contractor. If the negotiation fails, the classical scheme (i.e. the Engineer determines the valuation of the variations) applies. The extent of changes in the work characteristics and/or conditions determines whether the rates/prices in the BoQ can be applied directly [Clause 52(3)(a)], applied with adjustments [Clause 52(3)(b)] or a new rate/price is required [Clause 52(3)(b)]. There remains a high degree of subjectivity involved in determining which of these is appropriate. The determination of the valuation by the Engineer is prone to conflict whilst the system provides an opportunity for an unsatisfied Contractor to proceed into further claims [Clause 53(1) and (2)] or even dispute [Clause 66]. For the purposes of this paper, this engineers' determination scheme is also known as the decision-making mechanism since it involves a decision-making process.

3 Research Methodology

Prior to the development of the Knowledge Based System (KBS), a feasibility study was conducted in order to investigate the potential of developing a KBS to tackle the particular problem in this specific area [29]. The overall research methodology leading to the development of the KBS has previously been reported [28]. It was decided to focus on the excavation work due to its relative higher degree of uncertainties, hence using the ICE 7th [35] as the platform for the system.

In order to evaluate the current application of the mechanisms for valuing variations provided by the ICE 7th [35] in the UK construction industry, particularly civil engineering sector, and to acquire the practitioners' knowledge and subjectivity in valuing variations, a semi-structured questionnaire survey of relevant practitioners was conducted in the UK. The results of the survey were used to develop best practice in crafting a quotation to pre-price the variations encompassing perceptions and interpretations of contractors, engineers/consultants and employers [33]. Such best practice should help to increase the likelihood of the quotation being accepted

and help to avoid unnecessary subsequent stages that may be time consuming and costly. Data obtained from the survey was also utilised to develop the decision-making model on the extent of changes in the work characteristics and/or conditions for valuing variations [34]. Results from the analyses were used to develop the intended KBS.


Subsequent to the development of the KBS, an evaluation of the KBS was carried out with a relatively smaller population of practitioners. The evaluation consists of verification and validation whilst validation is subdivided into internal and external validation. The detail for verification and internal validation are explained in subsection 5.1. The external validation involved a demonstration of DEViCE and an interview. The result of the evaluation is presented in subsection 5.2. The demonstration and interviews were conducted throughout Britain (i.e. England, Scotland, and Wales). Each interview lasted for around 60 to 150 minutes (mean 80 minutes), including around 30 minutes to demonstrate the DEViCE. Seventeen practitioners were interviewed, comprising ten practitioners who originally contributed to the knowledge base through the questionnaire and had agreed to provide further assistance to this research project (intended to test and validate the content of the knowledge base), two novices (i.e. trainees) in order to explore the potential of the DEViCE as a learning and training tool particularly in valuing variations, and five other considered experienced practitioners/experts in the field who had not contributed to the questionnaire survey (recommended by some the original ten practitioners/experts) and involved in order to obtain more-neutral and unbiased opinions

4 Development of the KBS

For practical reasons, the developed KBS was named 'DEViCE' (Dynamic Expert-system for Valuing Variations in Civil Engineering). The use of the term Expert System was intended to eliminate any confusion since the term is widely known by practitioners [17].

DEViCE was developed using JSP technology with Tomcat version 4.1.27 from Apache's Jakarta Project as the web container (JSP server) allowing an embedment of Java programming language J2SDK 1.4.1_04 from Sun directly on the JSP pages. The Tomcat server works as a JSP Engine by translating the JSP files into JSP Servlets, works as Servlet-Engine by compiling the JSP Servlets into responses, and works as the Web Server by sending the responses to Client Browsers as requested. The JSP technology has enabled a

clear separation between the presentation part of the page (user interface) and its application logic (the algorithms and calculations) through the use of special JSP tags [37]. The main knowledge repository system (knowledge base) was developed with MySQL version 5.0 from MySQL AB. Minor parts of the knowledge base, i.e. the explanation and information texts were developed with HTML 4.0 and hence reside in the JSP server. The Java Database Connectivity (JDBC) driver used was MySQL Connector/J 3.0.8 from MySQL AB.

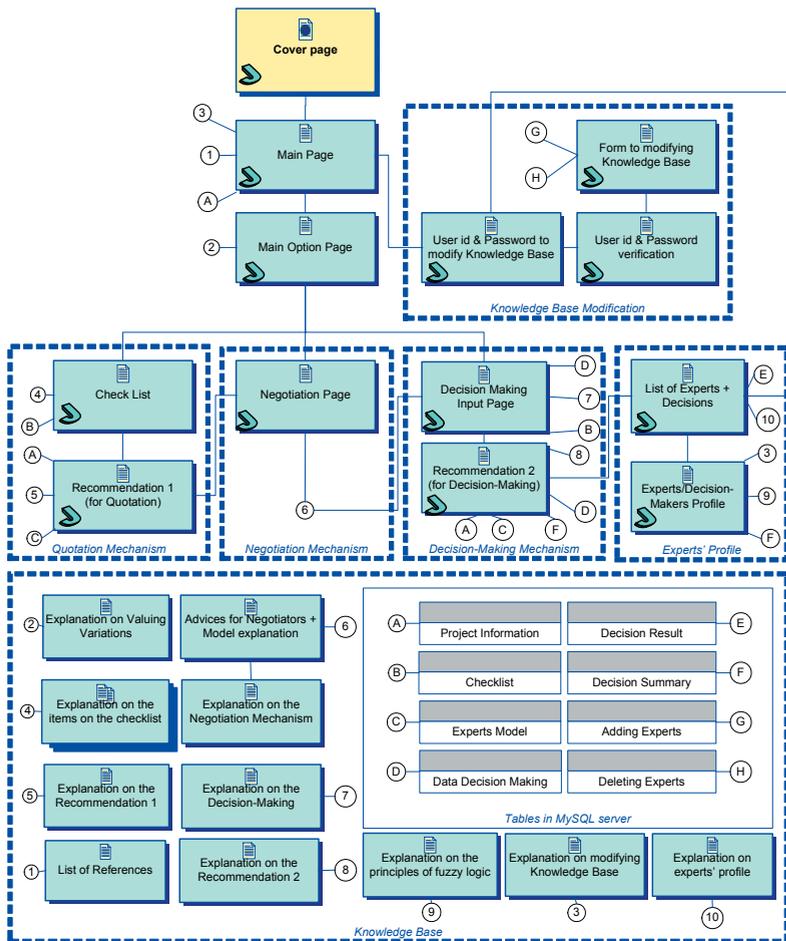

LEGEND

- HTML Page, residing in the JSP Server
- JSP Page, residing in the JSP Server
- SQL Table, residing in the MySQL Server
- Data flow/connection/new page
- A group of HTML/JSP Pages, residing in the JSP Server

Figure 1: Breakdown Structure of DEViCE

the quotation mechanism [33]. The survey findings also prescribed essential factors to be considered for inclusion and identified best practice for drafting a quotation. These findings have been converged to formulate a best practice model for preparing quotations to pre-price variations in civil engineering projects, particularly in excavation works [33]. Four attributes, namely overheads inclusion, pricing level, profits level, and contingencies for risks, are presented for inclusion in the best practice model together with essential factors to be considered, exclusively for excavation work.

These essential factors are detailed in an extensive checklist comprising all possible changes that need to be included in pre-pricing a variation. Correct inclusion of these factors as guided by the best practice model could increase the likelihood of a quotation being accepted. The best practice model provides a common ground for both contractors (in drafting quotations) and for engineers/consultants and employers (in assessing quotations for variations). The application of this best practice model should help to achieve an objective and mutual agreement between the project stakeholders with regard to the varied works.

Based on this, the quotation mechanism in DEViCE was developed comprising the extensive checklist and also the inclusion of the attributes necessary to

provide the recommendation to the user in preparing quotations with a higher likelihood for acceptance. The checklist is dynamically generated from information kept in the repository system, i.e. the knowledge base. The recommendation page dynamically displays the choices for the inclusion of recommended attributes in the quotation based on the users' input. Additionally, further information on the labelling of the choices of the attributes, and also on the best practice model for preparing a quotation is available. The snapshots of the quotation mechanism pages are provided in Figure 4.

4. 2 Negotiation Mechanism

Following the process of valuing variations according to the ICE 7th [35], and assuming the quotation is rejected, the next stage is the negotiation mechanism. Earlier stages of this research led to the development of a negotiation model based on various elements surround the negotiation process [32]. Relevant elements have been identified as the human factor bringing subjectivity and referred to as the psychological dimension, the organisational dimension, the social dimension as one of the main counter-forces maintaining the negotiating parties hold on the value of fairness, the legal dimension, and the opening bid (i.e. the rejected quotation).

The aim of developing this model was to provide a micro level understanding and a macro level overview of the whole negotiation process for the negotiating parties. A list of factors to be considered by both of the negotiating parties, based on the negotiation model, is provided as general advice for both parties to increase the chance of having a successful negotiation. This model has been refined based on the practitioners' feedbacks during the interview sessions subsequent to the development of DEViCE.

The success of a negotiation depends on each party's openness and willingness to reach a mutual agreement [32]. A mutual agreement, which is the objective of this negotiation scheme, is unlikely to be achieved when

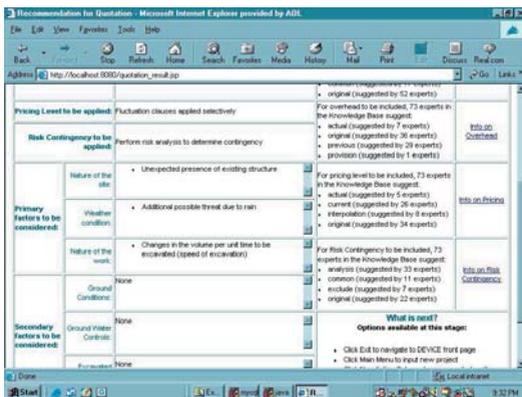


Figure 4: The snapshot of the recommendation (quotation) page

the parties apply aggressive negotiating approaches in seeking to take advantage over the other party during a variation event [21]. Therefore, for the negotiation mechanism, DEViCE is positioned as an explanation system rather than a decision support system as in the other two mechanisms. DEViCE provides a negotiation model with extensive explanation and generic advice and does not provide any specific recommendations.

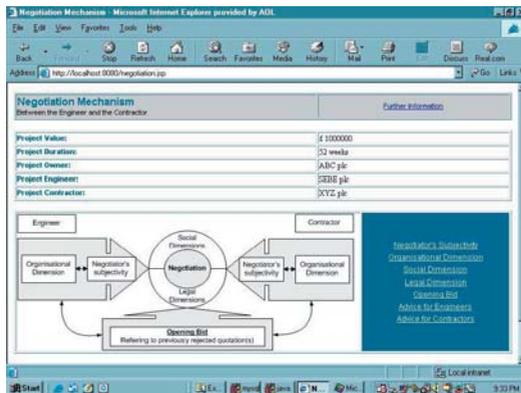


Figure 5: The snapshot of the negotiation mechanism page

4. 3 Decision-Making Mechanism

The next mechanism, if the negotiation fails, is known as the decision-making mechanism and was developed based on a decision-making model. The decision-making model was constructed using the basic principles of fuzzy-logic as described in Sutrisna et al [34]. The intention of applying fuzzy-logic in this problem area is to accommodate the uncertainties resulting from the decision-makers subjective interpretation in the valuation of variations rules provided by the ICE 7th [35]; particularly in the interpretation of similar work characteristics and/or similar work conditions. It has also been demonstrated that the use of fuzzy-logic in this matter required less knowledge acquisition from the experts/decision-makers. Hence, the use of fuzzy logic here has been considered necessary and beneficial. A brief explanation on the use of fuzzy-logic to model the decision-making process applied in the development of DEViCE now follows.

Let U be the universe of discourse. A fuzzy set F in U is characterised by a membership function as follows, $\mu_F: U \rightarrow [0,1]$. In the problem domain, valuation of variation, the universe of discourse U represents the collection of all possible value changes in the five decision attributes (i.e. changes in Programme, Human Resource, Construction Equipment, Material, and Sundry Charges). Three fuzzy sets (LOW, MEDIUM, and HIGH), which are directly associated with the three alternatives for the decision-making, were defined for the valuation of variations.

LOW is associated with the first decision alternative from the ICE 7th [35] which represent the application of the original rates/prices in the BoQ, i.e. the changes in the decision attributes are considered trivial. MEDIUM is associated with a certain degree of changes in the decision attributes that requires adjustments to be applied to the original rate/price from the BoQ. HIGH refers to a certain degree of changes in the decision attributes that necessitates a new rate/price to be derived from a fair valuation. The generic membership functions of the three fuzzy sets are graphically presented to the users (refer to Figure 7).

As there are no or only trivial changes in the decision attributes, the membership degree in LOW is fully 1 up to C1. As there are changes occurring and increasing, the degree of membership in LOW is decreasing from 1 to 0 up to C2. As the changes in the decision attributes increase, the degree of membership in MEDIUM is also increasing starting from C1. Starting from C2, the degree of membership in MEDIUM is fully 1 up to C3. Starting from C3, as the changes continue to increase, the degree of membership in MEDIUM starts to decrease from 1 to 0 up to C4. However, starting from point C3, as the changes continue to increase, the degree of membership in HIGH is also increased from 0 up to 1 up to C4. Starting from point C4 the degree of membership is HIGH.

The membership function of the three fuzzy sets can also be represented:

$$\mu_{Low}(u) = \begin{cases} 1, & u \leq C_1 \\ (C_2 - u) / (C_2 - C_1), & C_1 < u < C_2 \\ 0, & u \geq C_2 \end{cases}$$

$$\mu_{Medium}(u) = \begin{cases} 0, & u \leq C_2 \\ (u - C_1) / (C_2 - C_1), & C_1 < u < C_2 \\ 1, & C_2 \leq u \leq C_3 \\ (C_4 - u) / (C_4 - C_3), & C_3 < u < C_4 \\ 0, & u \geq C_4 \end{cases}$$

$$\mu_{High}(u) = \begin{cases} 0, & u \leq C_3 \\ (u - C_3) / (C_4 - C_3), & C_3 < u < C_4 \\ 1, & u \geq C_4 \end{cases}$$

Five decision attributes were identified in the decision-making process in the valuation of variations. Therefore, five membership functions were developed with three fuzzy sets on each. As the inference mechanism, the fuzzy aggregation operation proposed uses AND operator which is assumed as fuzzy intersection operation (I). In order to represent the AND operation, three aggregation operators were used and defined as:

Minimum operator: $\mu_{LowTotal}(u) = \min \{ \mu_{LOW}(u1), \mu_{LOW}(u2), \mu_{LOW}(u3), \mu_{LOW}(u4), \mu_{LOW}(u5) \}$

Arithmetic-sum operator: $\mu_{LowTotal}(u) = \{ \mu_{LOW}(u1) + \mu_{LOW}(u2) + \mu_{LOW}(u3) + \mu_{LOW}(u4) + \mu_{LOW}(u5) \}$

Algebraic-product operator: $\mu_{LowTotal}(u) = \{ \mu_{LOW}(u1) \cdot \mu_{LOW}(u2) \cdot \mu_{LOW}(u3) \cdot \mu_{LOW}(u4) \cdot \mu_{LOW}(u5) \}$

Where $u1, \dots, u5$ are the degrees of membership in LOW for all decision attributes. Applying similar procedures, the values of $\mu_{MediumTotal}(u)$ and $\mu_{HighTotal}(u)$ can be defined. The majority outcome is considered as a final result of these aggregation operations. A failure to have a majority results in an inconclusive operation.

The mapping of these values to the output of the inference mechanism is performed by applying OR operator which is basically fuzzy union operation (U) and defined as:

$$\begin{aligned} \text{Decision} &= \text{LOW OR MEDIUM OR HIGH} \\ &= \mu_{LowTotal}(u) \cup \mu_{MediumTotal}(u) \cup \mu_{HighTotal}(u) \\ &= \max \{ \mu_{LowTotal}(u), \mu_{MediumTotal}(u), \mu_{HighTotal}(u) \} \end{aligned}$$

In this max-operator, the highest value is selected as the decision. The defuzzification process of the result is not required as it already represents the decision.

In DEViCE, the user is requested to enter the value of the changes previously selected in the checklist. This information is then processed using the knowledge base and the decision-making algorithm written in the JSP. In order to improve the accuracy of the results; three operators were used to aggregate the membership values, namely the minimum operator, the arithmetic-sum operator, and the algebraic-product operator mentioned above. The majority outcome is considered as a final result of these aggregation operations. A failure to have a majority results in an inconclusive operation. However, based on the analysis of the questionnaire, certain aggregation operators are more dominant in certain conditions. A decision table on the relative dominance of the aggregation operators in deriving the final recommendation of DEViCE is presented in Table 1.

Based on the decision table, DEViCE is enabled to provide a final recommendation to the user even though the aggregation operators do not deliver a similar result. An essential further break down of the results from the decision-making model is also provided. This information enables the user of DEViCE to explore the decision resulting from the various backgrounds of the modelled decision-makers (i.e. contractors, engineers,

Result from Minimum operator	Result from Arithmetic-Sum operator	Result from Algebraic-Product operator	Recommended Decision
Low	Low	Low	Low
Low	Low	Medium	Low
Low	Low	High	Low
Low	Low	Inconclusive	Low
Low	Medium	Low	Low
Low	Medium	Medium	Medium
Low	Medium	High	Inconclusive
Low	Medium	Inconclusive	Low
Low	High	Low	Low
Low	High	Medium	Inconclusive
Low	High	High	High
Low	High	Inconclusive	Low
Low	Inconclusive	Low	Low
Low	Inconclusive	Medium	Low
Low	Inconclusive	High	Low
Low	Inconclusive	Inconclusive	Low
Medium	Low	Low	Low
Medium	Low	Medium	Medium
Medium	Low	High	Inconclusive
Medium	Low	Inconclusive	Medium
Medium	Medium	Low	Medium
Medium	Medium	Medium	Medium
Medium	Medium	High	Medium
Medium	Medium	Inconclusive	Medium
Medium	High	Low	Inconclusive
Medium	High	Medium	Medium
Medium	High	High	High
Medium	High	Inconclusive	Medium
Medium	Inconclusive	Low	Medium
Medium	Inconclusive	Medium	Medium
Medium	Inconclusive	High	Medium
Medium	Inconclusive	Inconclusive	Medium
High	Low	Low	Low
High	Low	Medium	Inconclusive
High	Low	High	High
High	Low	Inconclusive	High
High	Medium	Low	Inconclusive
High	Medium	Medium	Medium
High	Medium	High	High
High	Medium	Inconclusive	High
High	High	Low	High
High	High	Medium	High
High	High	High	High
High	High	Inconclusive	High
High	Inconclusive	Low	High
High	Inconclusive	Medium	High
High	Inconclusive	High	High
High	Inconclusive	Inconclusive	High
Inconclusive	Low	Low	Low
Inconclusive	Low	Medium	Inconclusive
Inconclusive	Low	High	Inconclusive
Inconclusive	Low	Inconclusive	Low
Inconclusive	Medium	Low	Inconclusive
Inconclusive	Medium	Medium	Medium
Inconclusive	Medium	High	Inconclusive
Inconclusive	Medium	Inconclusive	Medium
Inconclusive	High	Low	Inconclusive
Inconclusive	High	Medium	Inconclusive
Inconclusive	High	High	High
Inconclusive	High	Inconclusive	High
Inconclusive	Inconclusive	Low	Low
Inconclusive	Inconclusive	Medium	Medium
Inconclusive	Inconclusive	High	High
Inconclusive	Inconclusive	Inconclusive	Inconclusive

Table 1: A decision table for DEVICE's aggregation operators

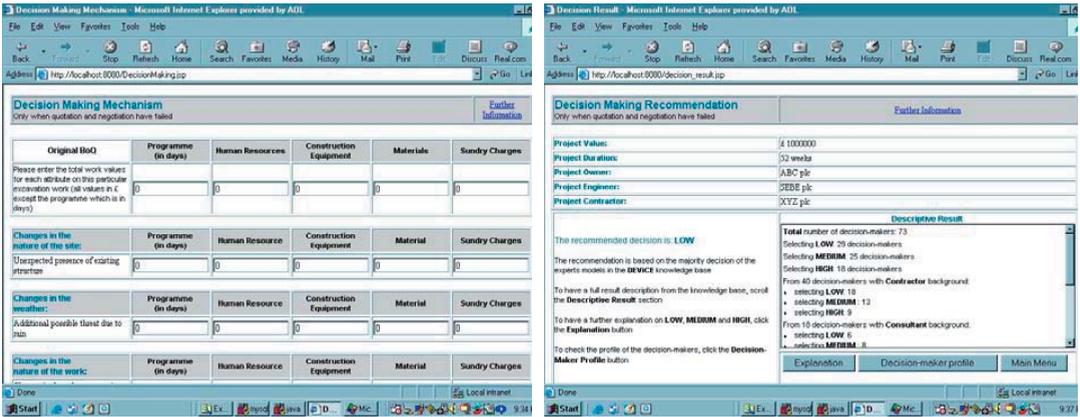


Figure 6: The snapshots of the decision-making mechanism pages

and employers). Thus, the users are informed of the distribution of the decision results among the different decision-makers to allow the users to better judge the final recommendation. A snapshot of the decision-making mechanism in DEViCE is presented in Fig. 6.

4. 4 Supporting modules

Supplementary to the three main mechanisms, there are other modules that support DEViCE, namely the explanation facility, list of references, experts' profile, and modification to the knowledge base. The explanation facility utilises the information from the knowledge base and inference engine to provide required explanations from the end user through the user interface. Thus, this explanation facility provides the user with a means of understanding that replicates a consultation session with human experts. Since decision-making in the valuation of variations often causes conflict and disputes, an explanation facility was required for this system [29]. The links to the explanation pages are made available on all of the main mechanism pages, providing instant explanation of the labelling and terminology used in the current main mechanism page and also brief background information on various matters based mainly on many published articles.

A list of references provides the users with full range of sources for further exploration and study. The explanation pages and the list of references page are HTML text pages with several text section anchors for linking purposes. Activation of the explanation pages and the references page creates new separate windows to reinforce the effect of being supplemental pages to the main mechanism pages. Every time the user finishes with an explanation page, he/she is prompted to close the supplemental page and return to the main pages. This is deliberately designed to avoid any hindrance to the main pages.

The users are also able to investigate the decision made by each model representing the decision-makers/experts currently held in the DEViCE knowledge base. The user can select any of the decision-makers/experts and obtain a profile of the decision-maker/expert. The information provided in the profile is the background experiences, choices of attributes for inclusion in preparing quotations, fuzzy-sets model of the decision-making, and advice on the selected decision-maker/expert. Personal information is not disclosed in respect to the Data Protection Act 1998. A brief and practical explanation on how the fuzzy logic works in modelling the decision-making process and deriving a decision to contribute to the final recommendation of the system is provided in order to satisfy the curiosity of the user.

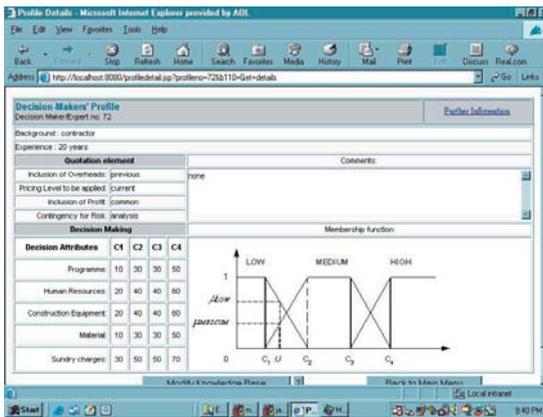


Figure 7: The snapshot of an expert's profile page

Users who wish to fully understand the mechanics of a fuzzy logic calculation are recommended to consult the literature listed in the references as a starting point. A snapshot of an expert's profile is provided in Fig. 7.

The option to modify the knowledge base is also an important feature. Once being activated, DEViCE requests the user's id and password. This is important to maintain the integrity of the KBS and changes to it may cause significant differences to the results and recommendations provided. Therefore, only authorised users with sufficient training are allowed to utilise this module to modify the content of the knowledge base. At this stage, access to modify the knowledge base is mechanised through the use of a request form. This form is then submitted and allocated to a temporary table within the knowledge base in the MySQL server and the implementation of the modification to the knowledge base is actually performed by the designer of the system or the system administrator upon further confirmation and validation.

5 Evaluation of the DEViCE

The purpose of evaluating a KBS is to ensure that the performance of the designed system is problem-free in terms of practical operation and/or technical structure.

The selected evaluation technique is verification and validation. Verification evaluation essentially addresses the intrinsic properties of the system and its components whilst validation checks the requirements of the system against certain standards to ensure the intended results and user satisfaction [4]. Verification focuses on ensuring the system is developed correctly, that it accurately gives solutions or results, and does not contain technical errors [4; 10; 18].

In the development of DEViCE, the verification evaluation was performed during the entire development process by the system developer, including iterated internal tests for micro level verification. The micro level verification encompasses criteria described in Awad [4], i.e. circular rule, completeness, confidence, correctness, consistency/inconsistency, redundancy, reliability, and subsumption rule. For the macro level verification, i.e. evaluating the entire system, the content of the knowledge based system was checked and approved by an expert in developing knowledge based systems and Java programming language, internal to the research project team.

Validation evaluation provides assurances that the solution or recommendation derived from the knowledge base sufficiently represents those of the human experts. Therefore, the validation should be tested by a black box approach, ignoring the internal mechanism of the system [4; 10]. In light of this, the validation process for DEViCE involves actual human experts and/or intended users. Here, the validation process is subdivided into internal validity and external validity.

Internal validity refers to whether the identified inputs within their attributes actually produce the expected output [20]. The internal validity procedures involved the questionnaire responses. The identified 'best practice' of preparing quotations for variations was validated by demonstrating the convergence among the literature search, analyses of the questionnaire survey and academic validity [33] whilst the model for

negotiation was validated by the convergence among the literature search, interviews with practitioners and academic validity [32]. For the developed decision-making mechanism, after the models had been developed, the decisions resulting from the models were statistically compared to the actual decisions of the practitioners to demonstrate the degree of accuracy of the developed models in deriving the decisions [34].

External validity refers to the extent to which any research findings can be generalised or extrapolated beyond the immediate research sample or setting in which the research took place [20]. In order to test a KBS, there are major steps to be taken involving preparation of sufficient variety of test cases, in-depth re-evaluation of the knowledge base and user interface mechanisms, and reduction of objectivity and gaining feedback from others [24]. However, unlike a conventional system, a KBS represents a process rather than a tool to implement the process with critical real-world consequences [7]. This nature of the problem solving provided by a KBS, through a certain interaction with the user, has created a different set of demands on the interface [11]. The main task of such an interface has been determined to match the interface to the user's cognitive task [26]. Therefore, in this research, the external validity was achieved by demonstrating a high degree of the user orientation, user acceptance (consists of user-perceived usefulness and perceived ease of use), and involvement through the entire life cycle of the DEViCE. This high degree of users orientation, acceptance, and involvement is also known as a user-centred approach [36].

5.1 User Orientation, Acceptance and Involvement

A KBS life cycle stages consists of feasibility study, knowledge engineering, design, implementation, testing, and maintenance [7]. During the feasibility study stage, the importance of the user orientation was recognised and established as a critical success factor for the KBS development [29]. During the knowledge

engineering phase, the background of the research project was communicated to the intended users during the questionnaire and their involvement with the knowledge acquisition process was inevitable due to the fact that the intended users are also the targeted practitioners for knowledge acquisition. In order to meet the objective of user acceptance during the design stage, the user interface was designed to be displayed through Internet browsers to support and encourage human-computer interaction [14]. In order to evaluate user acceptance, two criteria were used, namely user perceived usefulness and perceived ease of use [8]. User perceived usefulness is defined as the degree to which the user believes that using the system will enhance his/her performance, whereas user perceived ease of use is defined as the degree the user believes that using the system will be free from efforts.

Fifty-four of the ninety-five respondents to the survey agreed to further contribute to the research project by further interview(s) for validation and evaluation purposes. During the evaluation stage, much feedback from the practitioners were incorporated and led to numerous improvements in DEViCE. Collaboration with one of the practitioners from a large contracting firm was established. This collaboration mainly involves in-depth discussions with the key person in the firm to finalise the algorithm of DEViCE. The particular contracting firm also agreed to undertake a trial of DEViCE for long-term evaluation purposes. Therefore, the development stage of the DEViCE has been performed with a close involvement of the users and experts in the field. This is reinforced by a user involvement in the long-term maintenance stage of the prototype (DEViCE version 1.0).

5.2 The Evaluation Results

The evaluation was conducted by demonstrating the system and interviewing several practitioners from the quantity surveying in civil engineering sector, who are also potential users of DEViCE.. The profiles of the practitioners interviewed are provided in Table2.

Location	Type of Organisation	Position in Organisation	Experience	Interview duration
Wolverhampton, West Midlands	Contractor	Commercial Director	29 years	75 min
Wolverhampton, West Midlands	Contractor	Senior Commercial Manager	30 years	60 min
Grantham, Lincolnshire	Employer	Head of QS Department	33 years	60 min
Grantham, Lincolnshire	Employer	Senior QS	9 years	60 min
Grantham, Lincolnshire	Employer	Trainee QS	0.5 years	60 min
Northwich, Cheshire	Employer	Construction Manager	44 years	90 min
Buckley, Flintshire	Consultant	Director	30 years	90 min
Buckley, Flintshire	Consultant	Director	25 years	60 min
Birmingham, West Midlands	Consultant	Senior Consultant	36 years	90 min
Birmingham, West Midlands	Consultant	Senior Consultant	36 years	70 min
Alcester, Warwickshire	Consultant	Managing Director	23 years	90 min
Bristol, Avon	Law Consultant	Consultant	14 years	60 min
Bristol, Avon	Law Consultant	Regional Director	22 years	60 min
Glasgow, Lanarkshire	Consultant	Associate Director	35 years	120 min
Cannock, Staffordshire	Contractor	Project Coordinator	40 years	150 min
Solihull, West Midlands	Consultant	Associate Director	25 years	60 min
Solihull, West Midlands	Consultant	Trainee QS	2 years	60 min

Table 2: The profiles of the interviewed practitioners

The main objectives of the demonstrations and interviews were to validate the contents of the knowledge base, to measure the satisfaction level of the potential user, and also to obtain useful feedback for improvement. A sensitivity analysis was performed during the interviews by requesting the practitioners to provide different inputs to DEViCE. The recommendations made by DEViCE were then compared to the actual decisions expected by the practitioners under those inputs. Whenever a significant discrepancy occurred, further discussions leading to adjustment/fine-tuning

of the algorithm was conducted with the practitioners. These adjustments were continued until the detected discrepancies were eliminated.

Following the sensitivity analysis, a semi-structured interview was also conducted in order to record the practitioners' acceptance, opinions, and suggestions for improvement. The practitioners were asked for their general opinion on the novelty, general opinion on the development, general impression, and potential of DEViCE. The second part of the interview, requested the

practitioners to score each of the modules in DEViCE (i.e. quotation mechanism, negotiation mechanism, and decision-making mechanism) under certain criteria using a Likert scale of 1 to 5 (1 is assigned for poor and 5 is assigned for excellent). The threshold was established to be 3 (60%). If any of the modules were scored less than 3, a serious re-consideration and re-designing of the particular module would be required against the criteria. If the modules scored 3 or higher, only minor modifications might be required based on the practitioners' suggestions within the scope of the research project.

Practitioners were asked whether they were familiar with similar existing systems to DEViCE and if so, how DEViCE compared. As expected, all practitioners perceived DEViCE to be a novel approach in tackling the problems in valuing variations. This confirmed the claim that the problems in valuing variations have been informally articulated for long [2] and the need for a structured mechanism [28].

Most of the practitioners responded positively and opined that DEViCE was a good idea, considered both useful and helpful in this crucial area. It was mentioned that the outcome of this research might prevent or at least reduce conflict and disputes in valuing variations and assist parties in reaching agreement by providing a sound and systematic knowledge base. Some of the practitioners agreed that DEViCE could also be used for training purposes. This response is consistent with the aim and objectives of the research project.

There were, however, some concerns regarding the basic assumption taken in this research that the parties are open, fair, and willing to cooperate to solve a conflict or dispute. In reality, practitioners can be guided by many factors such as previous experience, objectives and goals of their organisations, the problem identified and defined, the hypothetical solutions, the information gathered and analysed, and their pre-assumptions [6]. Defining an assumption was needed to focus this research; therefore, it was necessary to assume that all

parties are rational and willing to cooperate to resolve the conflict and dispute by being fair and open to each other.

Another concern was on the future necessity to build an extensive database to cover all other activities in construction projects to deliver a comprehensive and complete solution to the construction industry, particularly in quantity surveying of civil engineering sector. That is, the KBS domain of expertise is usually narrow and only developed to solve specific problems with specific terms [15]. The development of such a database is however considered beyond the scope of this current research.

A majority of the practitioners (73%) were impressed by the system and confirmed that DEViCE had fulfilled, exceeded, or even far exceeded their expectations. Some (27%) said that DEViCE did not quite satisfy their expectations but this was found to be caused by a misunderstanding of the intended use of the tool by practitioners who are not originally involved in the development of DEViCE. Despite this mixed response, most agreed that in general DEViCE appeared professional, contained detailed information, and was relatively straightforward. It was also mentioned that DEViCE rationalised the process of valuing variations and reduced the dependencies on human elements of the process. Some suggested developing interfaces to link DEViCE with existing software packages, such as scheduling software, quantity surveying and estimating software, and even AutoCAD, again, to deliver a comprehensive and complete solution to the construction industry, particularly in quantity surveying of civil engineering sector. This again was considered beyond the scope of this research project.

After witnessing a demonstration of the system, practitioners were asked whether DEViCE had the potential to be used practically (i.e. to solve problems) and whether it might be suitable for commercialisation. The practitioners agreed that DEViCE had the potential but noted several conditions, such as the inclusion of

other activities in construction projects, obtaining consent from all parties, and also the development of interfaces to enable DEViCE to link with existing software packages. These suggestions while useful were acknowledged and will be recommended for further research. Furthermore, one trainee opined that the DEViCE certainly had much potential as a training tool for students and graduates due to the extensive explanation facilities and useful insight into the mechanics of the valuation of variations.

Results on the second part of the interview revealed all of the modules scored higher than 3, and thus maintained their inclusion in DEViCE and only minor modifications were required. The lowest score was for the completeness/coverage of the negotiation mechanism. As the success of negotiations heavily depends on each party's openness and willingness to reach a mutual agreement [32], the negotiation module in DEViCE was designed to be an informative tool to generally encourage the parties to seek a mutual attempt at successful negotiation and was not designed as an extensive repository of the knowledge body of negotiation science. The highest score was for the ease of use, including the navigation mechanism. This result was consistent with the intended user-centered approach, and confirmed a high level of users acceptance, particularly on the ease of use, for potential users of DEViCE. The results of the second part of the interview are presented in Table 3.

6 Conclusions

The valuation of variations has been acknowledged as one of the commonest causes of conflict and disputes. Referring to the rules of valuing variations provided by the ICE 7th [35] that provides three different mechanism for valuing variations, potential problems were identified as the subjective interpretation of the human experts/ decision-maker in interpreting the changes in the work condition and/or work character occurring as a result of a variation event. A framework for valuing variations in excavation works and in concrete works has been previously developed and reported, as has a negotiation model for valuing variations and also a feasibility study on the potential of eliciting the experts' knowledge and using a KBS for the valuation of variations.

In order to evaluate the current application of the mechanisms for valuing variations in the UK construction industry, particularly in quantity surveying of civil engineering sector, and to acquire practitioners' knowledge and subjectivity in valuing variations, a semi-structured questionnaire survey was conducted with a group of relevant practitioners in the UK. The result of the survey identified best practice in crafting a quotation to pre-price the variations that encompassed the perceptions and interpretations from contractors, engineers/consultants and employers. This should help to increase the likelihood of the quotation being accepted and help to avoid unnecessary further stages that may be time consuming and costly. Another essential section from the questionnaire was utilised to develop the decision-making model on the extent of changes in the work characteristics and/or conditions for valuing variations.

Table 3. The modular evaluation result of the DEViCE

Mean of the scores	Quotation Mechanism	Negotiation Mechanism	Decision-Making Mechanism
Usefulness	3.56	3.44	3.63
Completeness/Coverage	3.60	3.33	3.60
Ease of use (navigation, etc.)	4.38	4.31	4.38
Sufficiency of the Explanation Facilities	4.19	4.06	4.13

Based on the developed frameworks and the analysis of the questionnaire result, a KBS (i.e. named DEViCE) was developed using a user-centred approach. This approach required a high degree of the user orientation, satisfaction, and involvement through the entire life cycle of DEViCE. The evaluation was mainly conducted by demonstrating the system and interviewing seventeen practitioners from the construction industry, particularly in quantity surveying of civil engineering sector. The main objective of the demonstrations and interviews were to validate the contents of the knowledge base, to measure the acceptance level of potential users, and also to obtain useful feedback for improvement. Sensitivity analyses were performed during the interviews by requesting the practitioners to provide different inputs to check for any necessary adjustment/fine-tuning of the algorithm.

The interviews were divided into two sections. The first section concerned general issues of the novelty of the approach, the practitioners' opinions on the attempts made by the research project, the practitioners' general impression on the system in terms of fulfilling their initial expectation, and potential of the system as a practical problem-solver. Supportive responses were obtained from the practitioners and several suggestions for improvements and/or further research were also identified. Some practitioners were concerned about the openness, fairness, and willingness of project stakeholders to mutually solve the conflict or disputes. However, this was a basic assumption made in the earlier stages of the research and is congruent with the current ethos in the construction industry. The fact that the project stakeholders were willing to consult DEViCE was assumed as an attempt to be open, fair, and willing to solve conflict or disputes. Many of the practitioners also suggested inclusion of construction project activities other than excavation work and for the development of interfaces to allow DEViCE to work with other existing software packages. Whilst providing useful future development ideas for DEViCE, these were considered beyond the scope of this research. All of the modules contained in DEViCE

were maintained to be included in the DEViCE. The ease of use scored the highest, thereby confirming a high level of users acceptance, particularly on the ease of use, for potential users of DEViCE.

The development of a KBS, namely DEViCE and developed in order to minimise conflicts and disputes from the valuation of variations has been explained and discussed in detail. As the success of such a system depends on the interaction with its human-users, a user-centred approach was applied in building DEViCE. Supportive responses from the practitioners, were obtained to validate the knowledge base content, and to demonstrate the user acceptance. Following the user-centred approach, the intended users were involved in the stages of the system's development starting from its earliest stage. Important collaboration was established, involving an in-depth assistance by one of the practitioners in refining the algorithm and also a long-term assistance to undertake a trial of DEViCE for evaluation purposes, thus laying a solid platform for further development of the system. As demonstrated by the results of the evaluation process, the methodology in developing DEViCE can be considered as an appropriate methodology to tackle similar problems in this area. Hence, DEViCE is considered an appropriate system to minimise conflict and disputes from the valuation of variations and is recommended to assist practitioners in the UK construction industry, particularly in civil engineering sector, in valuing variations due to its robust algorithm, knowledge base content, and capabilities to incorporate a user-centred approach for its entire life cycle.

7 Acknowledgement

DEViCE was developed using tools freely downloaded from open source sites as follow:

<http://www.mysql.com>

<http://www.sun.com>

<http://jakarta.apache.org>

REFERENCES |

- [1] Abrahamson, M. W. (1985), *Engineering Law and the I.C.E. Contracts*, Elsevier Applied Science Publisher, London.
- [2] Akenhead, R. (1999), *Valuation of variations: the principles*, UK Commercial Arbitration Law Development, www.legal500.com/devs/uk/ca/ukca_021.htm, viewed: 09/12/02.
- [3] Akinsola, A.O. (1997), *An Intelligent Model of Variations' Contingency on Construction Projects*, Unpublished PhD thesis, University of Wolverhampton, Wolverhampton.
- [4] Awad, E. M. (1996), *Building Expert Systems: Principles, Procedures, and Applications*, West Publishing Company, St. Paul.
- [5] Barnes, N. M. L. (1971), *Civil engineering bills of quantities*, Report to CIRIA on Research Project No. 98, Department of Civil and Structural Engineering, UMIST, Manchester.
- [6] Bridges, F. J., Olm, K. W. & Barnhill, J. A. (1971), *Management Decisions and Organizational Policy: Text, Cases, and Incidents*, Allyn & Bacon, Boston.
- [7] Darlington, A. (2000), *The Essence of Expert System*, Prentice-Hall, Essex.
- [8] Davis, F. D. (1989), Perceived usefulness, perceive ease of use, and user acceptance of information technology, *MIS Quarterly*, 13, pp. 319-340.
- [9] Dorte, J. (1990), 'Variations', *Construction Law Journal*, v7, n4, pp. 281-302.
- [10] Geissman, J. R. & Schultz, A. D. (1988), *Verification and Validation of Expert System, AI Expert*, February, pp. 26-33.
- [11] Hendler, J. & Lewis, C. (1988) *Designing interfaces for expert system*, In: Hendler, J. (Ed.) *Expert System: The User Interface*, Ablex, Norwood.
- [12] Hibberd, P.R. (1980), *Building Contract-Variations*, Unpublished MSc thesis, UMIST, Manchester.
- [13] Hibberd, P. R. (1986), *Variations in Construction Contracts*, Collins, London.
- [14] Kekkonen-Moeta, S. & Moneta, B. (2002) *E-Learning in Hong Kong: comparing learning outcomes in online multimedia and lecture versions of an introductory computer course*, *British Journal of Educational Technology*, 33(4), pp. 423-433.
- [15] Mallach, E. G. (1994), *Understanding Decision Support Systems and Expert Systems*, Irwin/McGraw-Hill, Boston.
- [16] McGowan, P. H., Malcolm, R., Horner, W., Jones, D. & Thompson, P. A. (1992), 'Allocation and Evaluation of Risk in Construction Contracts', *CIOB Occasional Paper No. 52*, The Chartered Institute of Building, Ascot.
- [17] Newton, S. (1985), *Expert Systems and the Quantity Surveyor*, Royal Institute of Chartered Surveyor, Surveyors Publication, London.
- [18] O'Keefe, R. M, Balci, O. & Smith, E. P. (1987), *Validating expert system performance*, *IEEE Expert*, Winter, pp. 81-90.
- [19] Potts, K. F. (1995), *Major Construction Works: Contractual and Financial Management*, Longman Scientific & Technical, Essex.
- [20] Robson, C. (2002), *Real World Research: A Resource for Social Scientists and Practitioner-Researchers*, 2ed., Blackwell Publishers, Oxford.
- [21] Scott, B. & Billing, B. (1990), *Negotiating skills in engineering and construction*, Thomas Telford, London.
- [22] Seeley, I. H. & Murray, G. P. (2001), *Civil Engineering Quantities*, 6th ed., Palgrave, New York.
- [23] Shackel, B. (1984), *Information technology-A challenge to ergonomics and design*, *Behaviour and Information Technology*, 3, pp. 263-275.
- [24] Siegel, P. (1986), *Expert Systems: a non programmer's guide to development and applications*, TAB Books, Blue Ridge Summit.
- [25] Skinner, W. H. (1982) 'The contractor's use of bills of quantities', *CIOB Occasional Paper No.24*, The Chartered Institute of Building, Ascot.
- [26] Stelzner, M. & Williams, M. D. (1988) *The Evolution of interface requirements for expert system*, In: Hendler, J. (Ed.) *Expert System: The User Interface*, Ablex, Norwood.
- [27] Sutrisna, M & Potts, K. (2003a), 'Valuing Variations in Excavation Works: a Proposed Framework', In: Aouad, G. & Ruddock, L. (Eds.), *3rd International Postgraduate Research Conference*, 3-4 April 2003, Lisbon, University of Salford, pp. 499-510.
- [28] Sutrisna, M. & Potts, K. (2003b), 'A Proposed Research Methodology for Developing a Systematic Approach on Valuing Variations', In: Egbu, C & Tong, M. (Eds.), *1st Scottish Conference for Postgraduate Researchers in the Built & Natural Environment*, Glasgow, 18-19 November 2003, Glasgow, Glasgow Caledonian University, pp. 467-478.
- [29] Sutrisna, M., Potts, K. & Buckley, K. (2003a), 'An Expert System as a Potential Decision-making Tool in the Valuation of Variation', In: Proverbs, D. (Ed.), *2003 COBRA Conference*, 1-2 September 2003, Wolverhampton, RISC Foundation, London, pp. 314-326.

- [30] Sutrisna, M., Potts, K. & Proverbs, D. (2003b), 'Development of a framework for valuing variations in concrete works', 2nd International Structural Engineering and Construction Conference, 23-26 September 2003, Rome, Balkema Publisher, Lisse, pp. 129-136.
- [31] Sutrisna, M. (2004), 'Developing a knowledge based system for the valuation of variations', *Civil Engineering Surveyor*, December/January 2004, pp. 12-13.
- [32] Sutrisna, M. & Potts, K. (2004), 'A Negotiation Model for the Valuation of Variations in Civil Engineering Works', In: Ruddock, L., Amaratunga, D., Aouad, G., Kagioglou, M., and Sexton, M. (Eds.), 4th International Postgraduate Research Conference, 1-2 April 2004, Salford, University of Salford, pp. 53-63.
- [33] Sutrisna, M., Potts, K. & Proverbs, D. (2004a), 'Quotation mechanism for pre-pricing variations in civil engineering projects: a quest for best practice', *Journal of Financial Management of Property and Construction*, 9(1), pp. 13-25.
- [34] Sutrisna, M., Potts, K., Proverbs, D. & Buckley, K. (2004b), 'A decision making model for the valuation of variations on civil engineering projects', RICS Foundation Research Papers. (Accepted for forthcoming publication).
- [35] The Institution of Civil Engineers, The Association of Consulting Engineers & The Civil Engineering Contractors Association (1999), *ICE Conditions of Contract: Measurement Version*, 7th ed., Thomas Telford, London.
- [36] Torres, R. J. (2002), *Practitioner's Handbook for User Interface Design and Development*, Prentice Hall, Upper Saddle River.
- [37] Turner, J. (2002), *MySQL and JSP Web Applications*, Sams, Indianapolis.
- [38] Twort, A. C. & Rees, J. G. (1995), *Civil Engineering: Supervision and Management*, 3rd ed., Arnold, London.
- [39] Wallace, I. D. (1995), *Hudson's Building and Engineering Contracts: including the duties and liabilities*, v1, 11th ed., Sweet & Maxwell, London.
- [40] Winter, J. (2002), *Valuations of variations under the ICE Conditions of Contracts-the Thrills & Spills of tendering*, www.bakerinfo.com/documents/837_tx.htm, viewed: 22/01/02.